

Sovereign



CATALOG BICYCLE
2023-24

DRIVE YOUR SOUL

Road Symbiosis









Our Symbiosis with the Road comes from over 50 years of experience in rubber manufacturing.

Following the human evolution process we provided shoes in the very beginning, then moving on and creating bicycle tires and tubes.


Deli Tires manufactures a wide range of the tire products, from wheelbarrows tires to high performance car tires.

That's why we are the human motion technology experts. To seek the perfect journey you only need the perfect companion. You choose the destination, we take care of how to get you there. Safely and quickly. No matter which path you choose or the conditions you face, we will always be there, to support you.

OUR PHILOSOPHY

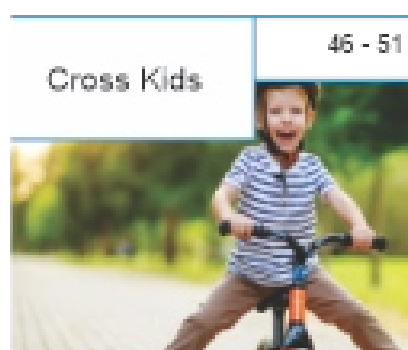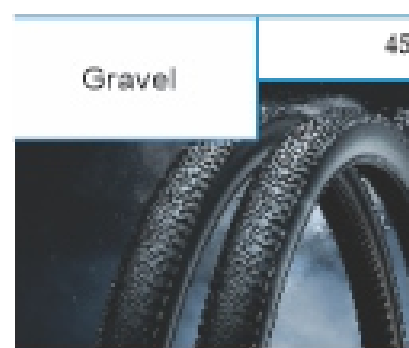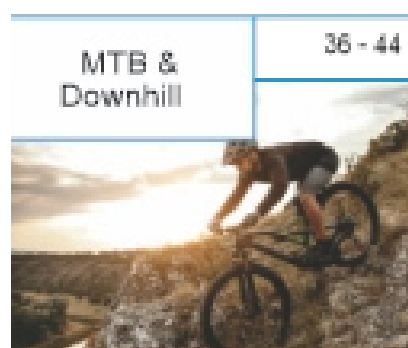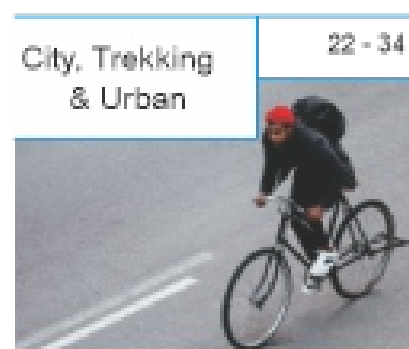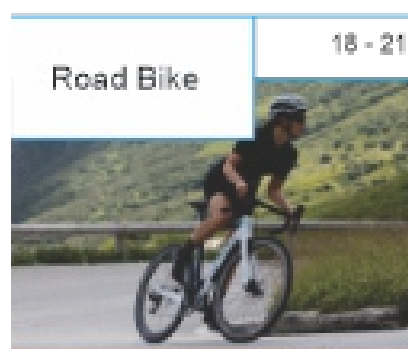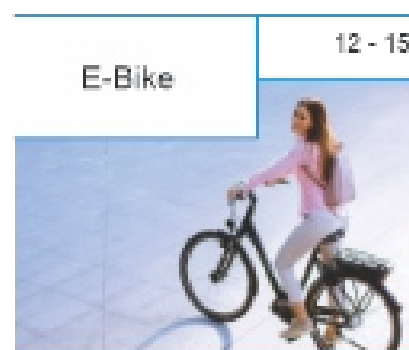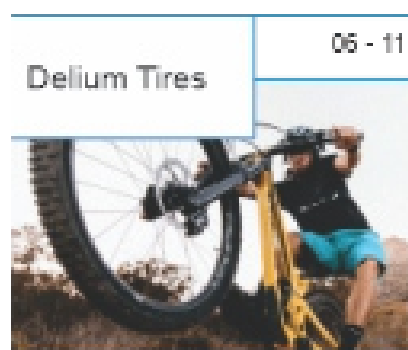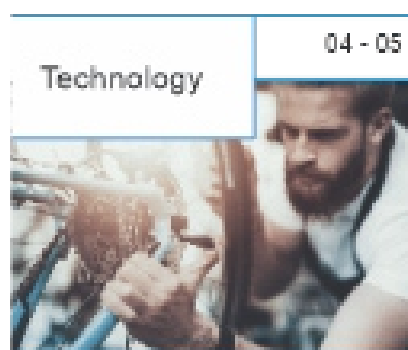

DATA SHEET

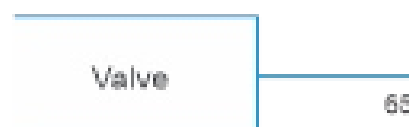

Safe and save

Road can be control by you.
Take your chance to get the full power and safety from
your bike through our tires.



Auto Sealant Tube

Auto Sealant Tube is our latest technology that allows riders to continue their race even after the tire has been punctured by an external object. Auto Sealant Tube symbol will be used to identify all Dell Tire products featuring this new technology.



- 1  Tire is fitted with inner tube with profiled sealant gel.
- 2  When puncture occurred on the tire/tube, the Sealant Gel got seeps out to the damage area and seal the leak.
- 3  In the case external object is extracted from the tire, the gel will seal the hole itself without affecting the tire performance.

Choose the technology according to your needs

PRBB

**Puncture
Resistance
Breaker Belt**



High Quality Compound combination: Tread compound designed for good balance of wear resistance and grip in wet and dry conditions, a long lasting layer for perfect road contact. Extremely tough rubber layer at the base of the tread improves stability and maneuverability, reducing rolling resistance and providing puncture resistance.

High strength nylon fabric casing plies to support load and pressure.
High tensile bead wire to ensure safety when carrying a heavy load.

HRPR

**Hard Rubber
Puncture
Resistance**



Hard Rubber Puncture Resistance is a Dell Tire Technology, designed to improve durability. With a protective layer under the tread to protect tire/tube from puncture and damages providing a more confident and safer ride.

UPP


**Ultimate
Puncture
Protection**



Dell UPP tire technology is our latest anti-damage innovation with extra-thick 7.5 mm flexigum under the tread plus one breaker layer providing maximum puncture protection.



MTB Technology

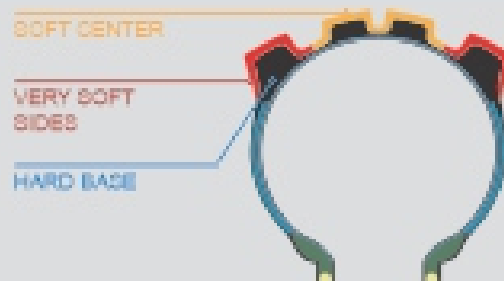

Rugged Adventure

SA-296

The Rugged Adventure is the tire with the most grip in our range of bicycle tire. Its designed to provide maximum traction and great cushioning on impact in technical terrain. The tall 6 mm center knobs also dig deep into dirt or mud.

CHOOSE YOUR CONSTRUCTION ACCORDING TO YOUR NEEDS

LIGHT CONSTRUCTION

Best for XC & Light Trail
Approx. 950g.

Ideal for XC and Light Trail riding, the Light construction features a lightweight casing developed to optimize rolling resistance. It has great durability and still provides sidewall cut protection where it's most needed.

ALL-ROUND CONSTRUCTION

Best for Trail & Enduro
Approx. 950g.

Ideal for Trail & Enduro disciplines, the All-Round construction incorporates our advanced technology to offer the best balance between grip and rolling resistance, as well as durability and protection.

REINFORCED CONSTRUCTION

Best for Enduro & Gravity
Approx. 1150g.



Ideal for Enduro & Gravity disciplines, the Reinforced construction incorporates our best technology to offer you maximum grip and protection while still maintaining a competitive weight.

STEADY ADVENTURE

The Steady Adventure tire is designed for mixed terrain conditions.

Its more rounded profile allows fast rolling and predictable handling.

The 4.5 mm medium height knobs provide sufficient traction for any riding adventure.

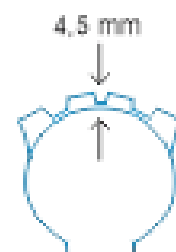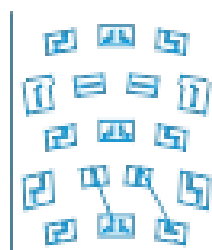

SA-295

Rolling



Road grip



Off-Road grip



Durability




SIZE	ETRTO (mm)	BEAD	COMPOUND
27.5X2.40	61-584	Aramid	Medium-Dual compound
27.5X2.40	61-584	Aramid	Soft-Triple compound
29X2.40	61-622	Aramid	Medium-Dual compound
29X2.40	61-622	Aramid	Soft-Triple compound
SKIN	PSI	BAR	TECHNOLOGY
Skinwall-Dual zone casing	23-50	1.6-3.5	LIGHT-TUBELESS READY
Skinwall-Triple zone casing	23-50	1.6-3.5	ALL ROUND-TUBELESS READY
Skinwall-Dual zone casing	23-50	1.6-3.5	LIGHT-TUBELESS READY
Skinwall-Triple zone casing	23-50	1.6-3.5	ALL ROUND-TUBELESS READY

LIGHT CONSTRUCTION

Best for XC & Light Trail - Approx. 950g.


Ideal for XC and Light Trail riding, the Light construction features a lightweight casing developed to optimize rolling resistance. It has great durability and still provides sidewall cut protection where it's most needed.

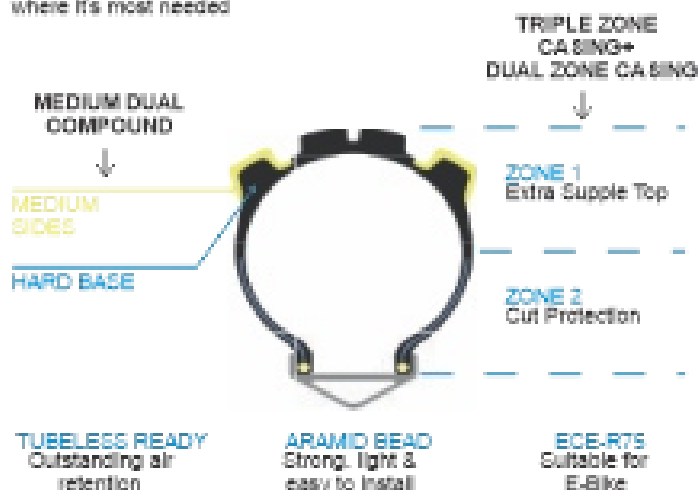

ALL-ROUND CONSTRUCTION

Best for Trail & Enduro - Approx. 1000g.

Ideal for Trail & Enduro disciplines, the All-Round construction incorporates our advanced technology to offer the best balance between grip and rolling resistance, as well as durability and protection.

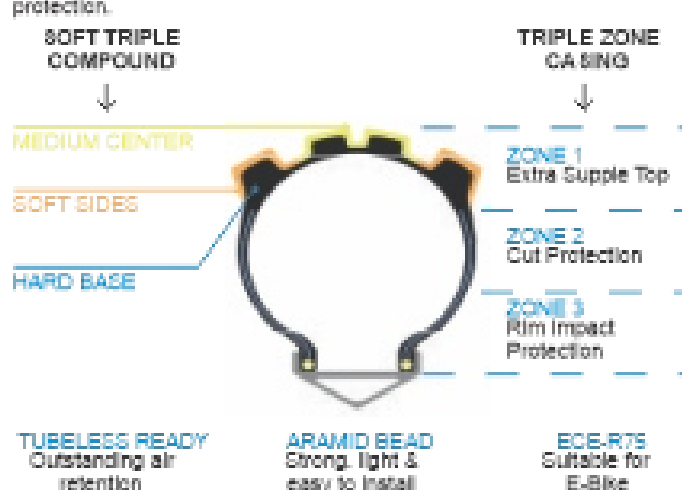



RUGGED ADVENTURE

The Rugged Adventure is the tire with the most grip in our range of bicycle tire. Its designed to provide maximum traction and great cushioning on impact in technical terrain.

The tall 6 mm center knobs also dig deep into dirt or mud.



SA-296

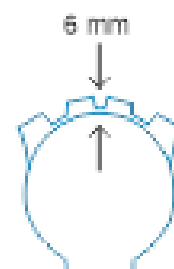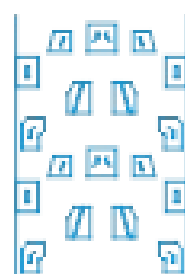


Rolling		Road grip	
Off-Road grip		Durability	

SIZE	ETRTO (mm)	BEAD	COMPOUND
27.5X2.50	63-584	Aramid	Soft-Triple compound
27.5X2.50	63-584	Aramid	Extra soft-Triple compound
29X2.50	63-622	Aramid	Soft-Triple compound
29X2.50	63-622	Aramid	Extra soft-Triple compound
SKIN	PSI	BAR	TECHNOLOGY
Skinwall-Triple zone casing	23-60	1.6-3.5	ALL ROUND-TUBELESS READY
Skinwall-Triple zone casing+	23-60	1.6-3.5	REINFORCED-TUBELESS READY
Skinwall-Triple zone casing	23-60	1.6-3.5	ALL ROUND-TUBELESS READY
Skinwall-Triple zone casing+	23-60	1.6-3.5	REINFORCED-TUBELESS READY

ALL-ROUND CONSTRUCTION

Best for Trail & Enduro - Approx. 1000g.


Ideal for Trail & Enduro disciplines, the All-Round construction incorporates our advanced technology to offer the best balance between grip and rolling resistance, as well as durability and protection.

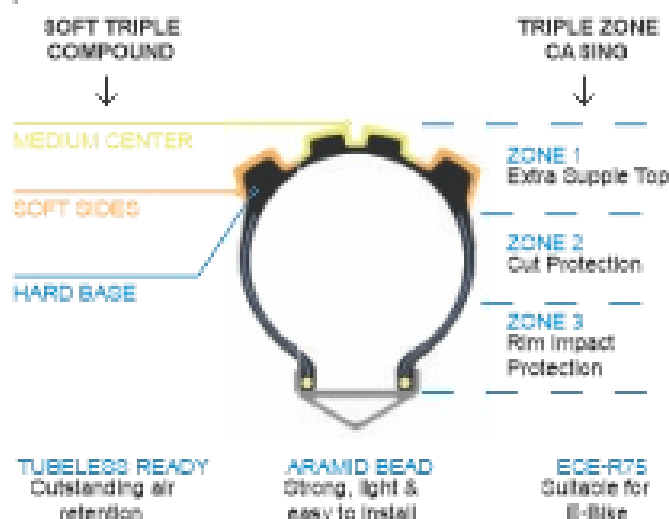

REINFORCED CONSTRUCTION

Best for Enduro & Gravity - Approx. 1200g.

Ideal for Enduro & Gravity disciplines, the Reinforced construction incorporates our best technology to offer you maximum grip and protection while still maintaining a competitive weight.


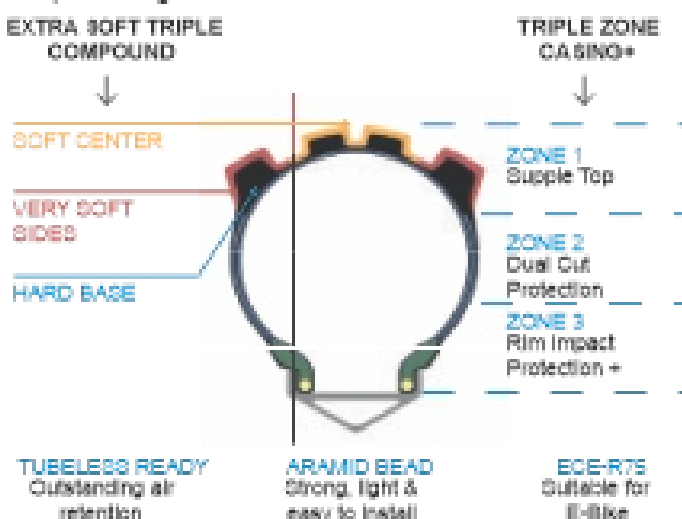


FAST ADVENTURE

As the name states, the Fast Adventure is a tire designed for speed. It excels on hard-pack and dry terrain. Its 4 mm knobs can still deliver remarkable cornering and braking traction.



SA-298

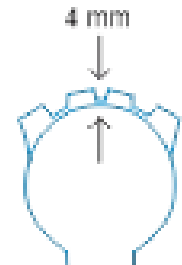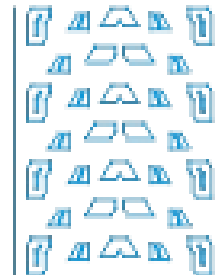


Rolling	////	Road grip	////
Off-Road grip	////	Durability	////

SIZE	ETRTO (mm)	BEAD	COMPOUND
27.5X2.40	61-584	Aramid	Medium-Dual compound
29X2.40	61-622	Aramid	Soft-Triple compound
27.5X2.40	61-584	Aramid	Medium-Dual compound
29X2.40	61-622	Aramid	Soft-Triple compound
SKIN	PSI	BAR	TECHNOLOGY
Skinwall-Dual zone casing	23-50	1.6-3.5	LIGHT-TUBELESS READY
Skinwall-Triple zone casing	23-50	1.6-3.5	ALL ROUND-TUBELESS READY
Skinwall-Dual zone casing	23-50	1.6-3.5	LIGHT-TUBELESS READY
Skinwall-Triple zone casing	23-50	1.6-3.5	ALL ROUND-TUBELESS READY

LIGHT CONSTRUCTION

Best for XC & Light Trail - Approx. 950g.


Ideal for XC and Light Trail riding, the Light construction features a lightweight casing developed to optimize rolling resistance. It has great durability and still provides sidewall cut protection where it's most needed.

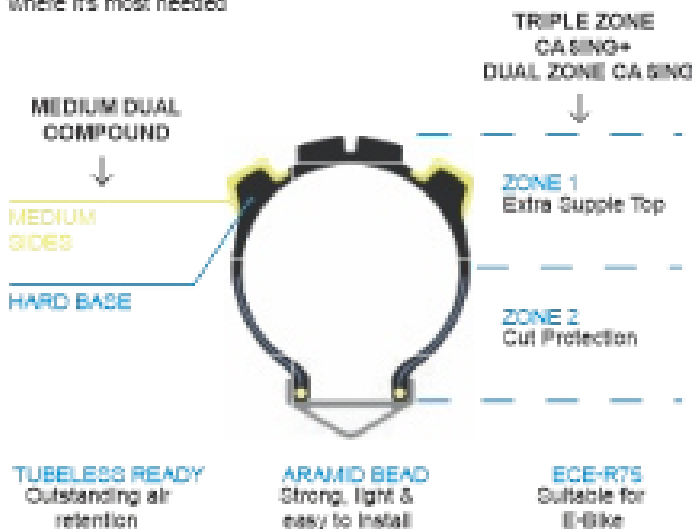

ALL-ROUND CONSTRUCTION

Best for Trail & Enduro - Approx. 1000g.

Ideal for Trail & Enduro disciplines, the All-Round construction incorporates our advanced technology to offer the best balance between grip and rolling resistance, as well as durability and protection.


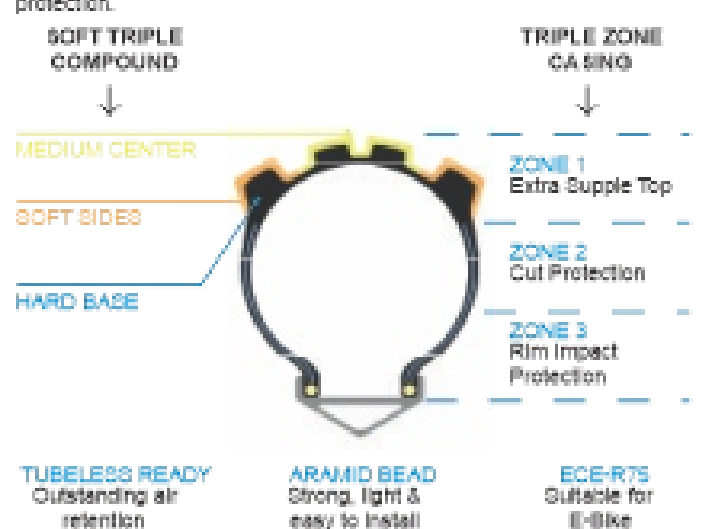


VERSATILE ADVENTURE

The Versatile Adventure is the ultimate tire for riding in any terrain and condition year round. It's a predictable tire that has a good balance between rolling resistance and grip. Its tall and wide knobs provide stability on hard surface while still digging deep into soft ground.



SA-299




Rolling	////	Road grip	////
Off-Road grip	////	Durability	////

SIZE	ETRTO (mm)	BEAD	COMPOUND
27.5X2.50	63-584	Aramid	Soft-Triple compound
27.5X2.60	63-584	Aramid	Extra soft-Triple compound
29X2.50	63-584	Aramid	Soft-Triple compound
29X2.50	63-584	Aramid	Extra soft-Triple compound
SKIN	PSI	SAR	TECHNOLOGY
Skinwall-Triple zone casing	23-50	1.6-3.5	ALL ROUND-TUBELESS READY
Skinwall-Triple zone casing+	23-50	1.6-3.5	REINFORCED-TUBELESS READY
Skinwall-Triple zone casing	23-50	1.6-3.5	ALL ROUND-TUBELESS READY
Skinwall-Triple zone casing+	23-50	1.6-3.5	REINFORCED-TUBELESS READY

ALL-ROUND CONSTRUCTION

Best for Trail & Enduro - Approx. 1000g.


Ideal for Trail & Enduro disciplines, the All-Round construction incorporates our advanced technology to offer the best balance between grip and rolling resistance, as well as durability and protection.

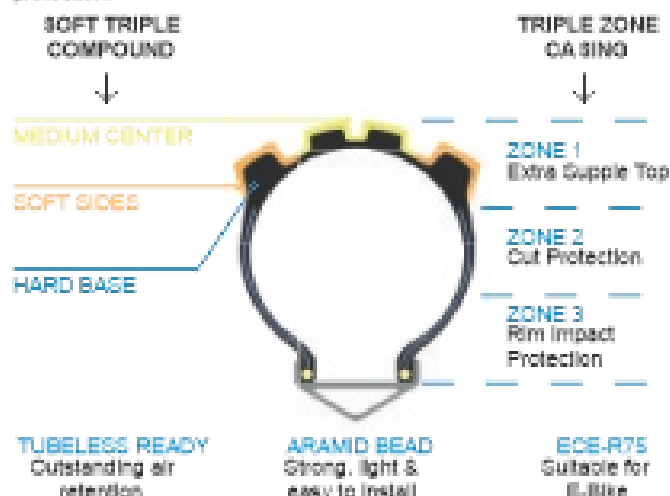

REINFORCED CONSTRUCTION

Best for Enduro & Gravity - Approx. 1200g.

Ideal for Enduro & Gravity disciplines, the Reinforced construction incorporates our best technology to offer you maximum grip and protection while still maintaining a competitive weight.

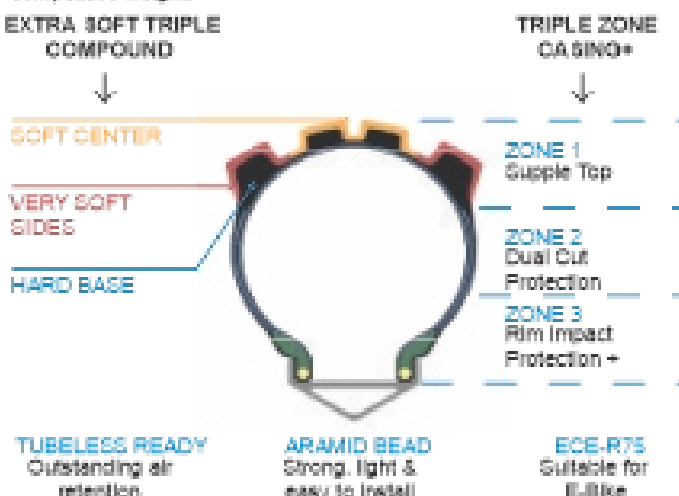

A person wearing a blue and black jacket and a helmet is riding a fat-tire bicycle on a snowy mountain trail. The bicycle has large, knobby tires and blue rims. The rider is leaning forward, and the background shows a clear blue sky and distant mountains.

FAT TIRE

E-Bike without compromise

E-Bike tires are our answer to the question

"Which DeliTire tires are best for E-bikes?"

Grip, stability, puncture protection, braking and low rolling resistance.

These are our needs.

Reliability on Top

Deli Tire e-bike ready are suitable to be equipped on pedelecs, built for prolonged application on the ground even at higher speed.

Pedelec is the latest innovation in the cycling business, an ideal environmental friendly vehicle for short to medium commuting.

Deli Tire propose a range of high quality tires specifically designed for E-bikes.



STREET FIGHTR

The StreetFightr is an e-bike and tubeless ready tire built for the future with an all new pattern design for both on/ offroad applications to help you traverse all terrain during your daily commute with your e-bike of choice.



SA-312

Rolling



Road grip



Off-Road grip



Durability



SIZE

ETRTO (mm)

PSI

BAR

20X4.00

102-406

8-30

0.3-2.1

THUNDR

The Thundr is a tubeless ready and e-bike ready tire that sports a wider center pattern and robust construction with the aim to enhance and optimize mileage by providing users a tire designed to have a low rolling resistance. With this tire, we aim to give our cyclists outstanding road performance and maneuverability.



SA-313

Rolling



Road grip



Off-Road grip



Durability



SIZE

ETRTO (mm)

PSI

BAR

20X4.00

102-406

8-30

0.6-2.1



delitire.com

A complete range of tires, specially designed for the particular needs of E-Bikes and listed on the following pages, which can be consulted at any time on www.delitire.com

E-Bike

Plug the electrical mobility.
Dell Tire propose a range of high quality tires specifically designed for E-bikes.



Special designed for E-Bikes.

NOBIKE **ECE-R75**

SA-234

Special designed for E-bike. Open grooves tread to optimize traction on wet roads.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700 x 35C	37-622	90 - 80	3.5 - 5.5
700 x 45C	47-622	35 - 65	3.5 - 5.5



SA-235

E-Bikes Regular used. One of popular tire is SA-235. This tire offers excellent rolling resistance and tread design also provides superior dry grip and wet grip.

Rolling



Road grip



Off-Road grip



SIZE

ETRTO (mm)

PSI

BAR

700 x 38C

40-622

90 - 80

3,5 - 5,5



SA-206

Semi slick tire suitable for urban use. No compromise for performance.

Rolling



Road grip



Off-Road grip



SIZE

ETRTO (mm)

PSI

BAR

26 x 1,75

47-559

35 - 65

2,4 - 4,5



SA-262

Performance tire designed for E-Bikes regular used.

Rolling



Road grip



Off-Road grip



SIZE

ETRTO (mm)

PSI

BAR

700 x 35C





37-622

90 - 80

3,5 - 5,5

Tone your Tire

Customize your tires: we deliver upon request color tire compounds suitable for every occasion. Stylish and bright colors make your bicycle fashionable the way you like it.

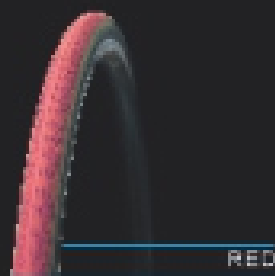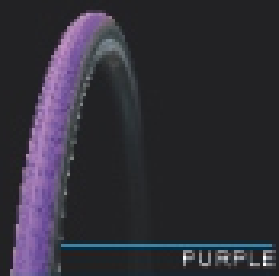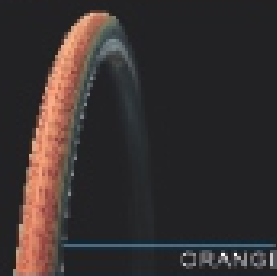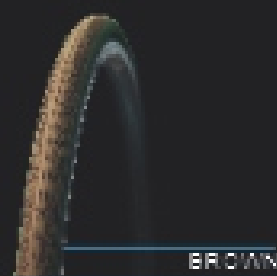

Fat Bike



DeliTire introduces BIG BUDDY.

SA-280

Deli Tire introduces BIG BUDDY. It's first tire dedicated to the ultimate generation of adventures riders. Big buddy is to be inspired from flying bird and good choice for sandy and muddy.

Rolling



Front grip



Off-Road grip



SIZE

ETRTO (mm)

PSI

BAR

26 x 4.0


100 - 559

30

2.0

Road Bike

Road can be control by you.
Take your chance to get the full power and safety from your bike through our tires.

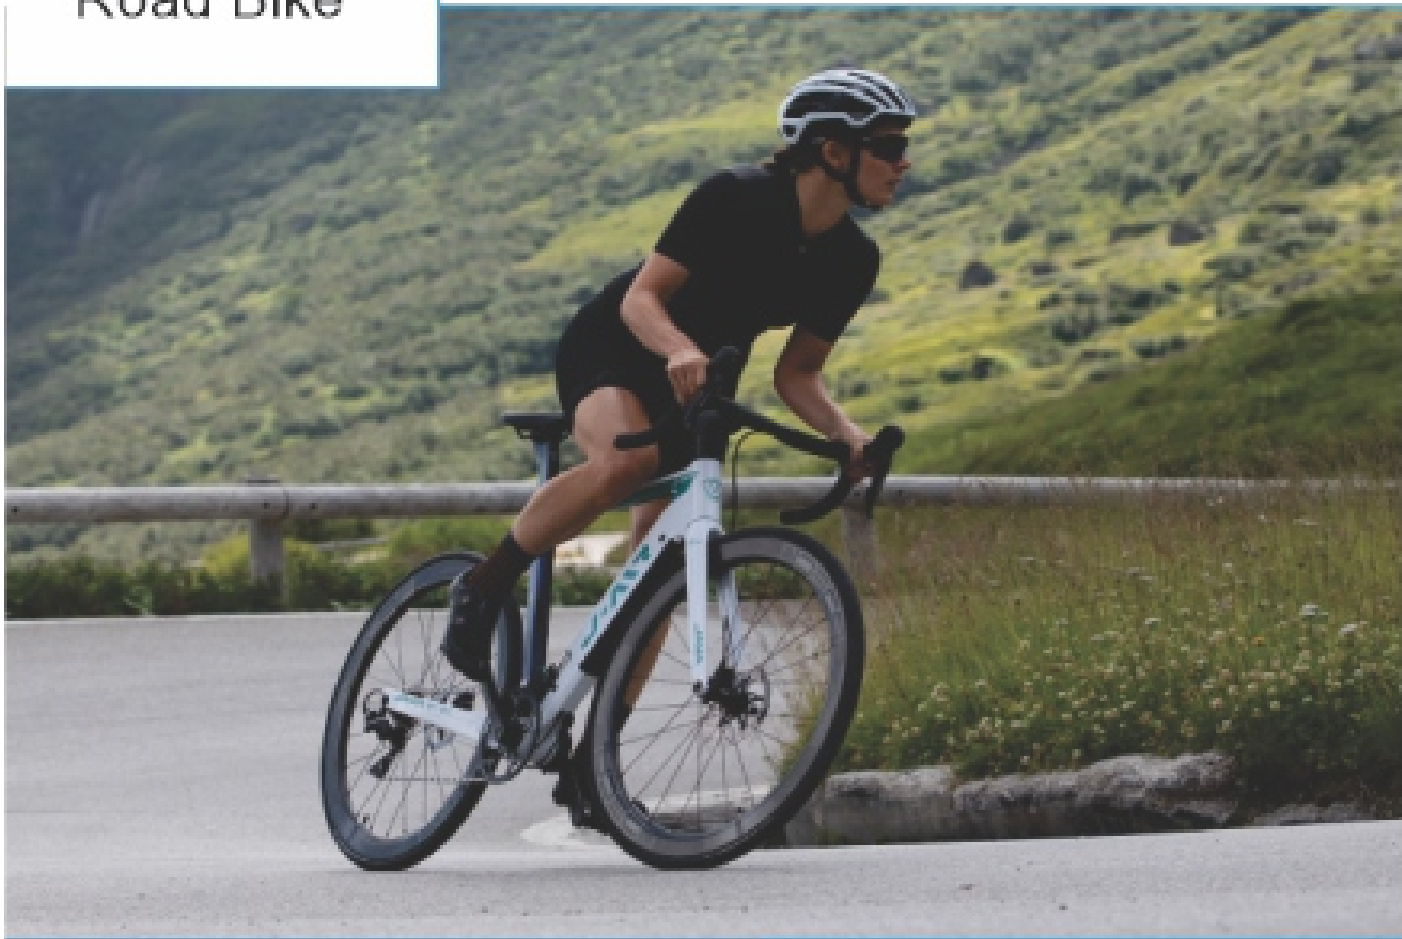

For excellent low rolling resistance.



127 TPI
SA-205

Smooth center tread with aramid folding bead and 127TPI casing for excellent low rolling resistance and also offers good durability.

Rolling Road grip Off-Road grip

SIZE	ETRTO (mm)	PSI	BAR
700 x 23C	23-622	80 - 120	5.5 - 8.3
700 x 25C	25-622	80 - 102	5.5 - 7.0

S-139

DelT Tire S-139 provides optimal performance while formulation compound ensure maximum traction on road for daily activity.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
27 x 1	28-630	73 - 100	5,0 - 6,9
27 x 1 1/4	32-630	73 - 100	5,0 - 6,9

S-140

Perfect to your racing bike. The profile and compound offers low rolling resistance and excellent handling.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
27 x 1 1/8	28-630	73 - 100	5,0 - 6,9
27 x 1 1/4	32-630	73 - 100	5,0 - 6,9
700 x 28C	28-622	80 - 102	5,5 - 7,0

S-145

Perfect to your racing bike. The profile and compound offers low rolling resistance and excellent handling.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
27 x 1 1/4	32-630	73 - 100	5,0 - 6,9

S-147

Traditional rib tread design for who like classic style. This pattern also ensure grip and durability even in a little wet terrain.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
700 x 20C	20-622	80 - 100	5,5 - 6,9
700 x 23C	23-622	80 - 100	5,5 - 6,9
700 x 25C	25-622	80 - 102	5,5 - 7,0



SA-215

Designed for dry and wet weather.



SIZE	ETRTO (mm)	PSI	BAR
700X23C	23-622	80-120	5,5 - 8,3



SA-249

Attractive tread design for road bike offers low rolling resistance in wet or dry conditions.



SIZE	ETRTO (mm)	PSI	BAR
700X23C	22-622	80-120	5,5 - 8,3
700X25C	25-622	80-102	5,5 - 7,0



SA-267

Impressive road tire with many colours for biker like style.



SIZE	ETRTO (mm)	PSI	BAR
700X24C	24-622	80-102	5,5 - 7,0



SA-301

The next generation unique road bike tire for ride faster, more comfortable and increased puncture protection to make you ride better.



SIZE	ETRTO (mm)	PSI	BAR
700X25C	25-622	80-102	5,5 - 7,0
700X28C	28-622	80-102	5,5 - 7,0



S-194

Perfect to your racing bike. The profile and compound offers low rolling resistance and excellent handling.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700X20C	20-622	80-100	5,5 - 6,9



S-195

Superior tire for general road bike provides optimum grip and low rolling characteristics.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700X23C	23-622	80-100	5,5 - 6,9



S-601

The new concept design with a excellent durability. This tire also available in multi colour to choosed for cosmetic appearance and suitable for your bike style.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700X20C	20-622	80-120	5,5 - 8,3
700X23C	23-622	80-120	5,5 - 8,3
700X25C	25-622	80-102	5,5 - 7,0
700X28C	28-622	80-102	5,5 - 7,0



S-603

Superior tire for general road bike provides optimum grip and low rolling characteristics.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700X28C	28-622	80-102	5,5 - 7,0



S-116



SIZE	ETRTO (mm)	PSI	BAR
27X1 3/8	37-630	44-100	3,0 - 6,9
18X1.75	47-335	35-50	2,4 - 3,5



S-139



SIZE	ETRTO (mm)	PSI	BAR
20X1 3/8	37-451	35-50	2,4 - 3,5
24X1 3/8	37-540	44-70	3,0 - 4,8
26X1 1/4	32-597	58-100	4,0 - 6,9



S-140

A performance tire with profile and compound technology offers low rolling resistance and excellent handling.



SIZE	ETRTO (mm)	PSI	BAR
26X1 3/8X1 1/8	28-590	80-100	5,5 - 6,9
700x32C	32-622	50-80	3,5 - 5,5
700x35C	37-622	50-80	3,5 - 5,5



S-141



SIZE	ETRTO (mm)	PSI	BAR
20X1.75X2	42-405	35-50	2,4 - 3,5
24X1.75X2	42-507	35-65	2,4 - 4,5
26X1.75X2	42-559	50-65	2,4 - 4,5
28X1.75	47-622	35-65	2,4 - 4,5
28X1.75X2	47-622	35-65	2,4 - 4,5
700X35C	37-622	50-80	3,5 - 5,5

City, Trekking & Urban



Light Up the city

REFLECTIVE

Safe with Reflective lines

We provide RL technology for each product upon request. Tires with Reflective Lines[®] make cyclists highly visible when illuminated, a perfect solution as a replacement for wheel reflectors.

ECE-R88
CERTIFICATION

RELIABILITY

Avoid Punctures

Modern cities are full of obstacles, some of our bicycle's worst enemies are pieces of glass, nails and screws forgotten on the road.

Dell Tire provides a list of antipuncture technologies available upon request.

Do not miss your next appointment, think it now and choose Dell Tire.



S-146

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X2.00	54-559	35-65	2,4 - 4,5
26X2.125	57-559	30-65	2,4 - 4,5



S-151

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1 3/8	37-590	44-70	3,0 - 4,8



S-154

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.75	47-559	35-65	2,4 - 4,5
26X2X1 1/2	54-584	50-65	3,5 - 4,5



S-161

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1 3/8	37-590	44-70	3,0 - 4,8
700X38C	40-622	50-80	3,5 - 5,5



S-172

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
650X35B	35-584	44-65	3,0 - 4,5



S-192

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
700X28C	28-622	80-102	5,5 - 7,0
700X32C	32-622	50-80	3,5 - 5,5
700X35C	35-622	50-80	3,5 - 5,5



S-193

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1 1/2X1 5/8	44-584	50-65	3,5 - 4,5



S-198

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.50	50-559	35-65	2,4 - 4,5
700X35C	37-622	50-80	3,5 - 5,5



S-602

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
700X38C	40-622	50-80	3,5 - 5,5



S-604

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X1 3/8	37-540	44-70	3,0-4,8
26X1 3/8	37-590	44-70	3,0-4,8
28X1 1/2	40-635	35-65	2,4-4,5
700X35C	37-622	50-80	3,5-5,5



S-611

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
700X38C	40-622	50-80	3,5 - 5,5
26X1.50	40-559	35-65	2,4-4,5



SA-204

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X2.30	-	35-50	2,4-3,5



SA-205

Smooth center tread with aramid folding bead and 127tpi casing for excellent low rolling resistance and also offers good durability.



SIZE	ETRTO (mm)	PSI	BAR
16x1 3/8	37-349	35-60	2.4-3.5
20x1 3/8	37-451	35-60	2.4-3.5
20x1.35	35-406	35-60	2.4-3.5



SA-206

Combination smooth tread design in the middle and open grooves through to the shoulder to maximize traction on dry and wet roads. Available in multi colour and silver reflective tape.



SIZE	ETRTO (mm)	PSI	BAR
20X1.75	47-406	35-60	2.4-3.5
22X1.75	47-456	35-60	2.4-3.5
24X1.75	47-507	35-65	2.4-4.5
26X1.75	47-559	35-65	2.4-4.5
26X2.10	54-559	35-65	2.4-4.5



SA-207



SIZE	ETRTO (mm)	PSI	BAR
700X37C	37-622	50-80	3.5-5.5



SA-209



SIZE	ETRTO (mm)	PSI	BAR
700X38C	40-622	50-80	3.5-5.5
700X45C	47-622	35-65	2.4-4.5





SA-214



SIZE	ETRTO (mm)	PSI	BAR
26X1 3/8	37-550	44-70	3.0-4.8
28X1 1/2	40-635	35-65	2.4-4.5



SA-216



SIZE	ETRTO (mm)	PSI	BAR
26X2.00	54-559	35-65	2.4-4.5



SA-218



SIZE	ETRTO (mm)	PSI	BAR
28X1 1/2	40-635	35-65	2.4-4.5



SA-220



SIZE	ETRTO (mm)	PSI	BAR
28X1 1/2	40-635	35-65	2.4-4.5



SA-225

Smooth middle tread provide a superior grip and excellent low rolling performance.



SIZE	ETRTO (mm)	PSI	BAR
26X1.38/1.40	37-559	35-65	2.4-4.5
26X1.75	47-559	35-65	2.4-4.5
700X35C	37-622	50-80	3.5-5.5
27.5X1.75	47-584	35-65	2.4-4.5
29X1.75	47-622	35-65	2.4-4.5



SA-228



SIZE	ETRTO (mm)	PSI	BAR
26X1.75	47-559	35-65	2.4-4.5



SA-230

Available in multi colour to choose and reflektif silver tape. This tire offers excellent performance in grip and low rolling.



SIZE	ETRTO (mm)	PSI	BAR
700X35C	37-622	50-80	3.5-5.5



SA-234

Tread design with open lateral grooves to optimize traction on wet roads while keeping a good rolling and durability



SIZE	ETRTO (mm)	PSI	BAR
26X1.75	47-559	35-65	2.4-4.5
28X1 1/2	40-635	35-65	2.4-4.5
700X35C	37-622	50-80	3.5-5.5
700X38C	40-622	50-80	3.5-5.5
700X45C	47-622	35-65	2.4-4.5



SA-235

One of popular tire is SA-235. This tire offers excellent rolling resistance and tread design also provides superior dry grip and wet grip.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X1.50	40-405	35-50	2.4-3.5
26X1.15	32-559	35-65	2.4-4.5
26X1.50	40-559	35-65	2.4-4.5
26X1.75	47-559	35-65	2.4-4.5
700X38C	40-622	50-80	3.5-5.5
27.5x1.50	40-584	35-50	2.4-3.5



SA-237

Semi slick and block tread design suitable for off road performance.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
27X1 3/8	37-630	44-100	3.0-6.9



SA-240

Excellent tread design for off road used and durability. Sidewall design completed your bike to be more good look.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.75	47-559	35-65	2.4-4.5
26X2.00	54-559	35-65	2.4-4.5



SA-249

SIZE	ETRTO (mm)	PSI	BAR
20X1.50	40-405	35-55	2.4-4.5



SA-251

Superior tread design provide excellent performance with low rolling resistance and better road grip.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
24X2.00	54-507	35-65	2.4-4.5
26X1.75	47-559	35-65	2.4-4.5
26X2.125	57-559	35-65	2.4-4.5



SA-252

Semi slick and block tread design suitable for off road performance.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
24X2.125	57-507	35-65	2.4-4.5
26X2.125	57-559	35-65	2.4-4.5



SA-256

Available in multi colour apply on your bike. SA-256 provides a better road grip and durability.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700X45C	47-622	35-65	2.4-4.5



S-601

The Swift Wist high performance road tire. trusty and smart choice. The tires offers excellent rolling resistance even in a wet terrain.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
27.5X1.75	47-584	35-65	2.4-4.5
29X1.75	47-622	35-65	2.4-4.5





SA-262

Aggressive tread design and a performance tire specially for daily activity in dry or wet conditions.



SIZE	ETRTO (mm)	PSI	BAR
700X35C	37-622	50-80	3.5-5.5



SA-265

A performance tire specially for daily activity.



SIZE	ETRTO (mm)	PSI	BAR
16x1 3/8	37-349	35-50	2.4-3.5
20X1.50	40-406	35-65	2.4-4.5
700X38C	40-622	50-80	3.5-5.5



SA-269

Semi slick tread design to offers excellent grip and high quality performance. SA-269 suitable for urban activity.



SIZE	ETRTO (mm)	PSI	BAR
700X28C	28-622	80-100	5.5-7.0



SA-274

A performance tire specially for daily activity.



SIZE	ETRTO (mm)	PSI	BAR
700X40C	42-622	35-65	2.4-4.5



SA-282

Hybrid design tread pattern in the center for fast rolling and low rolling resistance ideally on hardpack surface while offers excellent cornering with deeper shoulder knob.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
22X1.95	50-456	35-65	2.4-4.5
24X1.95	50-507	35-65	2.4-4.5
26X1.95	50-559	35-65	2.4-4.5
700X45C	47-622	35-65	2.4-4.5



SA-283

Semi slick design pattern suitable for city/urban and touring.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.75	47-559	35-65	2.4-4.5
700X45C	47-622	35-65	2.4-4.5



SA-293

Semi slick design pattern suitable for city/urban and touring.

SIZE	ETRTO (mm)	PSI	BAR
700X45C	47-622	35-65	2.4-4.5



SA-294

SIZE	ETRTO (mm)	PSI	BAR
24X2.00	52-507	35-65	2.4-4.5
700X45C	47-622	35-65	2.4-4.5



SA-302

Optimum touring cross tire offers good performance on/o ff conditions while keeping good stability.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
700X25C	25-622	80-102	5.5-7.0
700X28C	28-622	80-102	5.5-7.0



SA-306

Semi slick pattern special designed for your folding bike with good handling and low rolling resistance.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
16x1 3/8	37-349	35-60	2.4-3.5



SA-307

Suitable for folding bike with circumferential groove and small lateral groove provides better grip and excellent water channelling.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
16x1 3/8	37-349	35-60	2.4-3.5
20x1 1/8	28-451	35-60	2.4-3.5

MTB & Downhill

Everyone has his own inner eagle ready to spread the wings and run wild. Understanding the needs that move your passion, Dell Tire took particular care in offering you the best class. Thanks to our off-road tires you will feel free to explore your skills and to proof yourself how fast you are.



29"

Enjoy the bigger diameter

29", the revolution for MTB. This latest innovative diameter of the wheel provides improved roll-over, better stability and traction, as well as great comfort.

Dell Tire for 29er are the best choice for equipping your MTB, Trail or Enduro bike.



S-160

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X2.00	54-507	35-65	2.4-4.5
26X2.00	54-559	35-65	2.4-4.5



S-168

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X2.00	54-507	35-65	2.4-4.5
26X2.00	54-559	35-65	2.4-4.5

Big Monster

"Let your adventurous spirit always lead you move on to discover the world around you with its quirks and its wonders. Discover it will mean, for you, love him."
Kahili Glöwen



BIG MONSTER



SA-238

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X2.125	57-406	35-50	2.4-3.5
24X2.125	57-607	35-55	2.4-4.5
26X2.125	57-669	35-65	2.4-4.5



SA-272

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
28X2.00	50-622	35-65	2.4-4.5



SA-275

Rolling



Road grip




Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X2.35	60-559	35-65	2.4-4.5
29X2.35	60-622	35-65	2.4-4.5

Just Downhill

"The secret to mountain biking is pretty simple.
The slower you go the more likely it is you'll crash."
Julie Furtado

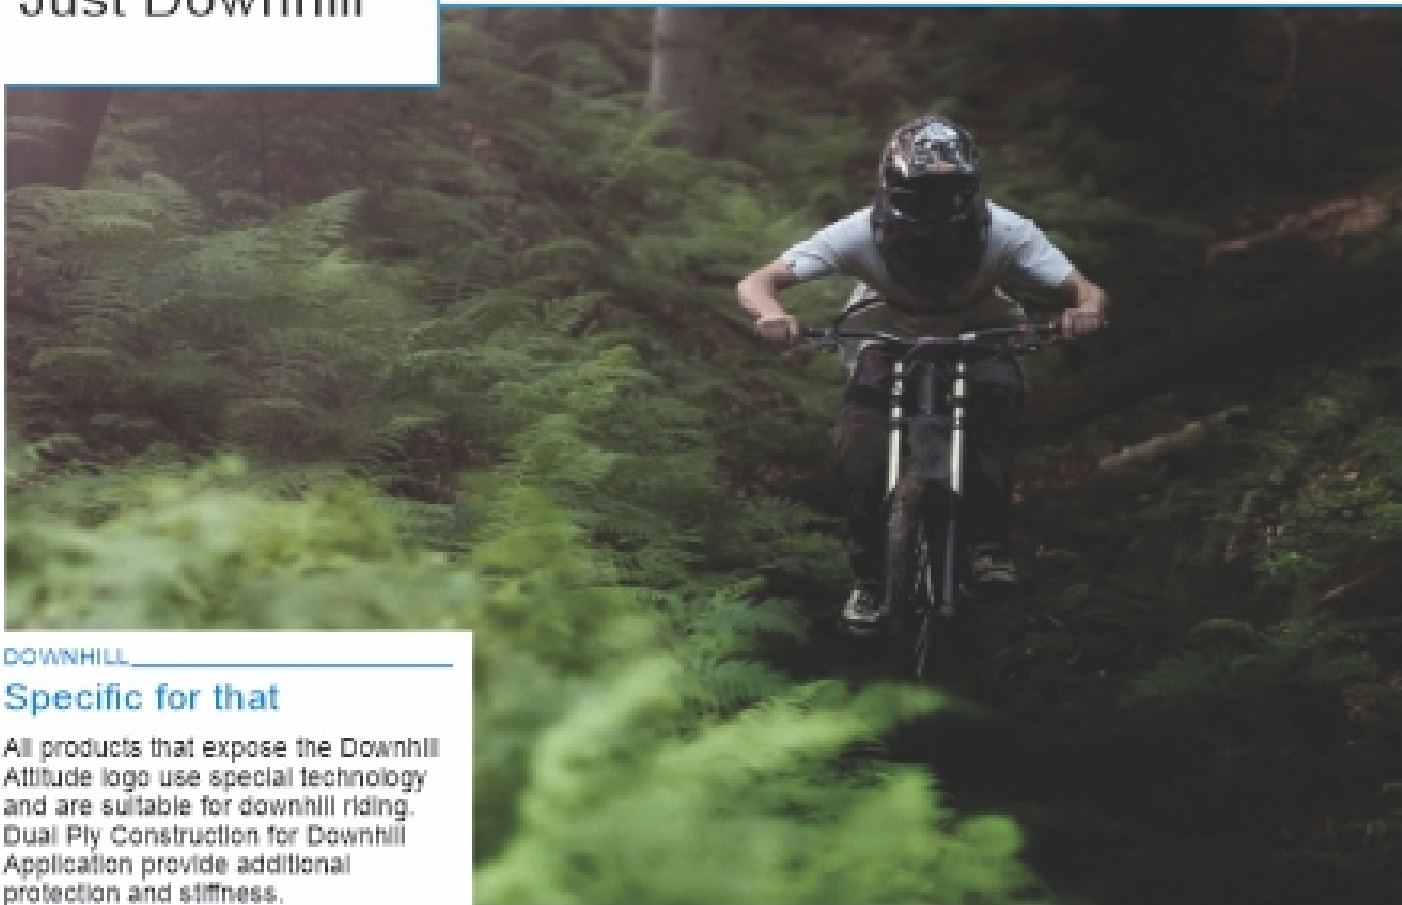

DOWNHILL

Specific for that

All products that expose the Downhill Attitude logo use special technology and are suitable for downhill riding. Dual Ply Construction for Downhill Application provide additional protection and stiffness.



S-609		Available in dwl colour. S-609 is designed to optimize traction, handling in every different conditions.		
		Rolling	Road grip	Off-Road grip
SIZE	ETRTO (mm)	PSI	BAR	
24X2.00	54-507	35-65	2.4-4.5	
26X2.00	54-659	35-65	2.4-4.5	



S-610		Available in dwl colour. S-610 is next generation of S-609 which also designed to cover all features plus low rolling resistance.		
		Rolling	Road grip	Off-Road grip
SIZE	ETRTO (mm)	PSI	BAR	
24X2.00	54-507	35-65	2.4-4.5	
26X2.00	54-659	35-65	2.4-4.5	





S-176A

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X1.75	47-507	35-65	2.4-4.5
26X1.75	47-559	35-65	2.4-4.5



S-180

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X2.10	55-559	35-65	2.4-4.5



S-190

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.95	50-559	35-65	2.4-4.5
26X2.10	55-559	35-65	2.4-4.5



S-602

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X1.75	47-507	35-65	2.4-4.5
26X1.90	50-559	35-65	2.4-4.5



S-613

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X1.95	50-507	35-65	2.4-4.5
26X1.95	50-559	35-65	2.4-4.5



S-614

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X1.95	50-507	35-65	2.4-4.5
26X1.95	50-559	35-65	2.4-4.5



S-616

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.90	50-559	35-65	2.4-4.5



S-619

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.90	50-559	35-65	2.4-4.5

Just MTB

It is a mixed new category composed by the best aspects of MTB and FAT bike tires. A bigger volume allows lower air pressure so it becomes more comfort, grip and safety.



S-620

Rolling 

Road grip 

Off-road grip 

SIZE

ETRTO (mm)

PSI

BAR

26X1.95

50-559

35-65

2.4-4.5



S-621

Rolling 

Road grip 

Off-road grip 

SIZE

ETRTO (mm)

PSI

BAR

26X1.90

50-559

35-65

2.4-4.5



S-622

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X1.90	50-559	35-65	2.4-4.5
26X2.10	54-559	35-65	2.4-4.5



SA-201

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X2.10	55-559	35-65	2.4-4.5



SA-207

The fast rolling tire and deeper knobs on the shoulder for excellent grip.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
24X1.75	47-507	35-65	2.4-4.5
26X1.90	50-559	35-65	2.4-4.5



SA-224

The center knobs of SA-224 offers less rolling resistance.

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
26X2.10	54-559	35-65	2.4-4.5
24X2.00	54-507	35-65	2.4-4.5



SA-229

Aggressive tread knobs for loose dirt, wet and rocky terrain.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
26X2.10	54-559	35-65	2.4-4.5



SA-236

The unique design like continue bone shape provides good handling and smooth riding.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
26X1.95	50-559	35-65	2.4-4.5

DOWNHILL ATTITUDE



SA-239

Special used for downhill bikes offers all technical features jumps and turns. This SA-239 is a good choice for your bike.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
26X2.10	51-559	35-65	2.4-4.5
26X2.35	53-559	35-65	2.4-4.5
26X2.50	55-559	35-65	2.4-4.5
27.5X2.50	55-584	35-65	2.4-4.5



SA-243

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
24X1.75	47-507	35-65	2.4-4.5



SA-254

The special design of the knobs with unique base ensure comfort riding.



SIZE	ETRTO (mm)	PSI	BAR
26X1.95	50-559	35-65	2.4-4.5



SA-255

Designed to gives performance grip and better rolling capacity.



SIZE	ETRTO (mm)	PSI	BAR
26X2.10	54-559	35-65	2.4-4.5
27.5X1.90	50-584	35-65	2.4-4.5
29X1.90	50-622	35-65	2.4-4.5



SA-257

The unique concept tire design in the middle for maximize rolling bike and the shoulder knobs also maintain traction in wet or mud terrain.



SIZE	ETRTO (mm)	PSI	BAR
26X1.95	50-559	35-65	2.4-4.5



SA-258

Mountain bike tire developed to provide excellent cornering and breaking performance in offroad versatility.



SIZE	ETRTO (mm)	PSI	BAR
27.5X2.10	54-584	35-65	2.4-4.5
27.5X2.25	57-584	35-65	2.4-4.5
29X2.10	54-622	35-65	2.4-4.5

Gravel

We live in the fast lane. In symbiosis with the road, waiting for the next horizon.

GRAVEL

Safely enjoy off-road adventures with GRA-VITY, the new DelTire tires that ensure maximum cornering stability and punctual braking response to your Gravel. Thanks to its characteristic pattern, GRA-VITY also reacts best on gravel and dusty roads. Whatever your destination, reach it without sacrificing comfort.

SA-300

Special designed for riding on gravel performance and as normal road bike as well. The V-shape center knobs ensure your bike run faster and side knobs provide good grip in every angle cornering.

Rolling  Road grip  Off-Road grip 

SIZE	ETRTO (mm)	PSI	BAR
700x35C	37-622	35-72	2.5-5.0
700x38C	40-622	35-72	2.5-5.0
700x40C	42-622	35-72	2.5-5.0



SA-263

Mountain bike tire developed to provide excellent cornering and braking performance in offroad versatility.



SIZE	ETRTO (mm)	PSI	BAR
27.5X2.10	54-584	35-65	2.4-4.5



SA-264

One of the best tire for your MTB bike. The bigger side knob ensure smooth cornering . Available in 62TPI carcass construction for better puncture.



SIZE	ETRTO (mm)	PSI	BAR
29X2.25	57-622	35-65	2.4-4.5



SA-270

The fast tire designed especially for hard and dry conditions. The knobs provide excellent grip and performance.



SIZE	ETRTO (mm)	PSI	BAR
26X2.10	54-559	35-65	2.4-4.5
27.5X2.10	54-584	35-65	2.4-4.5
29X2.10	54-622	35-65	2.4-4.5



SA-281

Special arrangement tread design and wider shoulder for mixed, rocky and wet terrains. These features ensure to maximize lateral grip and braking performance.



SIZE	ETRTO (mm)	PSI	BAR
27.5X2.25	57-584	23-50	1.6-3.5
27.5X2.35	60-584	23-50	1.6-3.5
29X2.25	57-622	23-50	1.6-3.5

Cross Kids

Kids are always on the run. What really matter is they always ride safe. Our tires are strong enough to ensure a terrific playful experience even on the toughest trails.



Speed up the fun!

From the first rides to the most exciting jumps on cross paths, Dell Tire will remain on your side. With a huge range of small tire for your kids, we want to provide them the best first experience on a bicycle. Dell Tire's Junior collection has also freeride tire for every needs.



S-114

Rolling



Root grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20x2.125	57-405	35-50	2.4-3.5

**S-117**Rolling
Road grip
Off-Road grip

SIZE	ETRTO (mm)	PSI	BAR
16X1.75	47-305	35-50	2.4-3.5
20X1.75	47-405	35-50	2.4-3.5

**S-118**Rolling
Road grip
Off-Road grip

SIZE	ETRTO (mm)	PSI	BAR
20X2.125	57-405	35-50	2.4-3.5

**S-173**Rolling
Road grip
Off-Road grip

SIZE	ETRTO (mm)	PSI	BAR
12 1/2X2 1/4	62-203	35-50	2.4-3.5

**S-176**Rolling
Road grip
Off-Road grip

SIZE	ETRTO (mm)	PSI	BAR
20X1.75	47-405	35-50	2.4-3.5
22X1.75	47-455	35-50	2.4-3.5





S-179

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
14X1 3/8X1 5/8	44-288	35-50	2.4-3.5
16X1.75	47-305	35-50	2.4-3.5
20X1.75	47-406	35-50	2.4-3.5



S-186

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
12 1/2X1.75X2 1/4	47-203	35-50	2.4-3.5
14X1 3/8X1 5/8	44-288	35-50	2.4-3.5
14X1.75	47-254	35-50	2.4-3.5
16X1.75	47-305	35-50	2.4-3.5
20X1.90	50-406	35-50	2.4-3.5



S-196

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
12 1/2X1.75X2 1/4	47-203	35-50	2.4-3.5
14X1.75	47-254	35-50	2.4-3.5
16X1.75X2	47-305	35-50	2.4-3.5



S-199

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X1.75	47-406	35-50	2.4-3.5
20X1.95	54-406	35-50	2.4-3.5



S-602



SIZE	ETRTO (mm)	PSI	BAR
12 1/2X1.75X2 1/4	47-203	35-60	2.4-3.5
14X1 3/8X1 5/8	44-288	35-60	2.4-3.5
16X1.75	47-305	35-60	2.4-3.5
20X1.75	47-406	35-60	2.4-3.5



S-615



SIZE	ETRTO (mm)	PSI	BAR
12 1/2X1.75X2 1/4	47-203	35-60	2.4-3.5
16X2.125	57-305	35-60	2.4-3.5
20X1.90	50-406	35-60	2.4-3.5



SA-203



SIZE	ETRTO (mm)	PSI	BAR
12 1/2X1.75X2 1/4	47-203	35-60	2.4-3.5
14X1 3/8X1 5/8	44-288	35-60	2.4-3.5
16X1.75	47-305	35-60	2.4-3.5



SA-206



SIZE	ETRTO (mm)	PSI	BAR
12 1/2X1.75X2 1/4	47-203	35-60	2.4-3.5
12 1/2X2 1/4	62-203	35-60	2.4-3.5
14X1 3/8X1 5/8	44-288	35-60	2.4-3.5
14X1.75	47-254	35-60	2.4-3.5
16X1.75	47-305	35-60	2.4-3.5
18X1.75	47-355	35-60	2.4-3.5



SA-207



SIZE	ETRTO (mm)	PSI	BAR
16X1.75	47-305	35-50	2.4-3.5
18X1.75	47-355	35-50	2.4-3.5
20X1.75	47-406	35-50	2.4-3.5
22X1.75	47-456	35-50	2.4-3.5



SA-210B



SIZE	ETRTO (mm)	PSI	BAR
16X2.125	57-305	35-50	2.4-3.5



SA-233



SIZE	ETRTO (mm)	PSI	BAR
14X1.75	47-254	35-50	2.4-3.5
16X1.75	47-305	35-50	2.4-3.5



SA-235



SIZE	ETRTO (mm)	PSI	BAR
16X1.50	40-305	35-50	2.4-3.5



SA-240

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X1.75	47-406	35-50	2.4-3.5
20X2.125	57-406	35-50	2.4-3.5



SA-251

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X1.75	47-406	35-65	2.4-4.5



SA-282

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
20X1.95	50-406	35-65	2.4-4.5

Stroller & Wheelchair



Get out help

Dell Tire think about every single needs. From the wheelchair to the stroller, we cover as much tire uses as we can, helping people to travel.

WHEELCHAIR

Helping everybody

Also wheelchairs need comfort and performance in terms of all day life. We are focused on helping all people that need specific products, offering them only the best.

Durability is an other aspect of the life of your stroller, the safety and the comfort for your baby is our priority.



DESIGNED FOR
WHEELCHAIRS

S-187

Rolling



Road grip



Off-Road grip



SIZE

24X1 3/8

ETRTO (mm)

37-540

PSI

50-70

BAR

3.5-4.8



SA-227

Rolling



Road grip



Off-Road grip



SIZE

12 1/2X1.75X2 1/4

ETRTO (mm)

51-203

PSI

35-50

BAR

2.4-3.5



SA-253

Rolling



Road grip



Off-Road grip



SIZE

20X2.125

ETRTO (mm)

57-406

PSI

35-50

BAR

2.4-3.5



SA-259

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
10X2.0	54-152	35-50	2.4-3.5
12 1/2X2 1/4	62-203	35-50	2.4-3.5



SA-206

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
10X2.0	54-152	35-50	2.4-3.5



SA-266

Rolling



Road grip



Off-Road grip



SIZE	ETRTO (mm)	PSI	BAR
50X1.60	-	28-40	2.0-2.8
280X65	-	28-40	2.0-2.8
225X48	-	28-40	2.0-2.8



DELIUM MTB TIRES

Size	ETRTO (mm)	Bead	Pattern	PSI	BAR	COMPOUND
27.5X2.50	63-584	Aramid	SA-296	23 - 60	1.6-3.5	Soft-Triple compound
27.5X2.50	63-584	Aramid	SA-296	23 - 60	1.6-3.5	Extra soft-Triple compound
27.5X2.40	61-584	Aramid	SA-296	23 - 60	1.6-3.5	Medium-Dual compound
27.5X2.40	61-584	Aramid	SA-296	23 - 60	1.6-3.5	Soft-Triple compound
27.5X2.40	61-584	Aramid	SA-298	23 - 60	1.6-3.5	Medium-Dual compound
27.5X2.40	61-584	Aramid	SA-298	23 - 60	1.6-3.5	Medium-Dual compound
27.5X2.50	63-584	Aramid	SA-299	23 - 60	1.6-3.5	Soft-Triple compound
27.5X2.50	63-584	Aramid	SA-299	23 - 60	1.6-3.5	Extra soft-Triple compound
29X2.40	61-622	Aramid	SA-296	23 - 60	1.6-3.5	Medium-Dual compound
29X2.40	61-622	Aramid	SA-296	23 - 60	1.6-3.5	Soft-Triple compound
29X2.40	61-622	Aramid	SA-298	23 - 60	1.6-3.5	Soft-Triple compound
29X2.40	61-622	Aramid	SA-298	23 - 60	1.6-3.5	Soft-Triple compound
29X2.50	63-622	Aramid	SA-296	23 - 60	1.6-3.5	Soft-Triple compound
29X2.50	63-622	Aramid	SA-296	23 - 60	1.6-3.5	Extra soft-Triple compound
29X2.50	63-584	Aramid	SA-299	23 - 60	1.6-3.5	Soft-Triple compound
29X2.50	63-584	Aramid	SA-299	23 - 60	1.6-3.5	Extra soft-Triple compound

DELIUM FAT TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
20X4.00	102-406	-	SA-312	5-30	0.3-2.1	
20X4.00	102-406	-	SA-313	8-30	0.6-2.1	

RACING TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
27 x 1	25-630	SS	S-139	73 - 100	5,0 - 8,9	
27 x 1 1/8	28-630	SS	S-140	73 - 100	5,0 - 8,9	
27 x 1 1/4	32-630	SS	S-139	73 - 100	5,0 - 8,9	
	32-630	SS	S-140	73 - 100	5,0 - 8,9	
	32-630	SS	S-145	73 - 100	5,0 - 8,9	
700 X 20C	20-622	SS	S-147	80 - 100	5,5 - 8,9	
	20-622	SS	S-194	80 - 100	5,5 - 8,9	
	20-622	SS	S-601	80 - 120	5,5 - 8,3	
700 X 23C	23-622	SS	S-147	80 - 100	5,5 - 8,9	
	23-622	SS	S-195	80 - 100	5,5 - 8,9	
	23-622	SS	SA-205	80 - 120	5,5 - 8,3	
	23-622	SS	SA-215	80 - 120	5,5 - 8,3	
	23-622	SS	SA-249	80 - 120	5,5 - 8,3	
	23-622	SS	S-601	80 - 120	5,5 - 8,3	
700 X 24C	24-622	SS	SA-267	80 - 102	5,5 - 7,0	
700 X 25C	25-622	SS	S-147	80 - 102	5,5 - 7,0	
	25-622	SS	S-601	80 - 102	5,5 - 7,0	
	25-622	SS	SA-205	80 - 102	5,5 - 7,0	
	25-622	SS	SA-249	80 - 102	5,5 - 7,0	
700 X 28C	28-622	SS	S-140	80 - 102	5,5 - 7,0	
	28-622	SS	S-601	80 - 102	5,5 - 7,0	
	28-622	SS	S-603	80 - 102	5,5 - 7,0	

CITY - TREKKING - URBAN TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
18 x 1.75	47-355	HB	S-116	35 - 50	2,4 - 3,5	
20 x 1 3/8	37-461	SS	S-139	35 - 50	2,4 - 3,5	
20 x 1.50	40-405	HB	SA-235	35 - 50	2,4 - 3,5	
20 x 1.75 x 2	42-408	SS	S-141	35 - 50	2,4 - 3,5	
20 x 1.75	47-405	HB	SA-206	35 - 50	2,4 - 3,5	
20 x 2.125	57-408	HB	SA-238	35 - 50	2,4 - 3,5	
20 x 2.30		HB	SA-204	35 - 50	2,4 - 3,5	
22 x 1 3/8	37-601	SS	S-110	35 - 50	2,4 - 3,5	
22 x 1.75	47-455	HB	SA-206	35 - 50	2,4 - 3,5	
22 x 1.95	50-455	HB	SA-202	35 - 65	2,4 - 4,5	
24 x 1 3/8	37-640	SS	S-110	44 - 70	3,0 - 4,8	
	37-640	SS	S-139	44 - 70	3,0 - 4,8	
	37-640	SS	S-604	44 - 70	3,0 - 4,8	
24 x 1.75 x2	42-607	SS	S-141	35 - 65	2,4 - 4,5	
24 x 1.75	47-607	HB	S-109	35 - 65	2,4 - 4,5	
24 x 1.75	47-607	HB	SA-206	35 - 65	2,4 - 4,5	
24 x 1.95	50-607	HB	SA-232	35 - 65	2,4 - 4,5	
24 x 2.00	54-607	HB	SA-251	35 - 65	2,4 - 4,5	
24 x 2.125	57-607	HB	SA-238	35 - 65	2,4 - 4,5	
	57-607	HB	SA-252	35 - 65	2,4 - 4,5	
26 x 1	29-659	HB	S-195	35 - 65	2,4 - 4,5	
26 x 1.15	32-659	HB	SA-235	35 - 65	2,4 - 4,5	
26 x 1.38/1.40	37-659	HB	SA-225	35 - 65	2,4 - 4,5	
26 x 1 1/4	32-697	SS	S-139	58 - 100	4,0 - 6,9	
26 x 1 3/8 x 1 1/8	28-690	SS	S-140	80 - 100	5,5 - 6,9	
26 x 1 3/8	37-690	SS	S-110	44 - 70	3,0 - 4,8	
	37-690	SS	S-131	44 - 70	3,0 - 4,8	

CITY - TREKKING - URBAN TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	DAR	REMARK
	37-590	SS	S-151	44 - 70	3,0 - 4,8	
	37-590	SS	S-161	44 - 70	3,0 - 4,8	
	37-590	SS	S-604	44 - 70	3,0 - 4,8	
	37-590	SS	SA-214	44 - 70	3,0 - 4,8	
26 x 1 1/2	40-584	SS	S-131	44 - 65	3,0 - 4,5	
26 x 1 1/2 x 1 5/8	44-584	SS	S-193	50 - 65	3,5 - 4,5	
650 x 35B	36-584	SS	S-172	44 - 65	3,0 - 4,5	
26 x 1.59	40-559	HB	S-811	35 - 65	2,4 - 4,5	
	40-559	HB	SA-235	35 - 65	2,4 - 4,5	
26 x 1.75	47-559	HB	S-154	35 - 65	2,4 - 4,5	
	47-559	HB	S-165	35 - 65	2,4 - 4,5	
	47-559	HB	SA-206	35 - 65	2,4 - 4,5	
	47-559	HB	SA-225	35 - 65	2,4 - 4,5	
	47-559	HB	SA-228	35 - 65	2,4 - 4,5	
	47-559	HB	SA-234	35 - 65	2,4 - 4,5	
	47-559	HB	SA-235	35 - 65	2,4 - 4,5	
	47-559	HB	SA-240	35 - 65	2,4 - 4,5	
	47-559	HB	SA-251	35 - 65	2,4 - 4,5	
	47-559	HB	SA-263	35 - 65	2,4 - 4,5	
26 x 1.75 x 2	42-559	SS	S-141	50 - 65	3,5 - 4,5	
26 x 1.92	50-559	HB	S-199	35 - 65	2,4 - 4,5	
26 x 1.95	50-559	HB	SA-202	35 - 65	2,4 - 4,5	
26 x 2.09	54-559	HB	S-146	35 - 65	2,4 - 4,5	
	54-559	HB	SA-216	35 - 65	2,4 - 4,5	
	54-559	HB	SA-240	35 - 65	2,4 - 4,5	
26 x 2.19	54-559	HB	SA-206	35 - 65	2,4 - 4,5	
26 x 2.125	57-559	HB	S-146	35 - 65	2,4 - 4,5	
	57-559	HB	SA-238	35 - 65	2,4 - 4,5	
	57-559	HB	SA-251	35 - 65	2,4 - 4,5	
	57-559	HB	SA-252	35 - 65	2,4 - 4,5	
26 x 2.35	60-559	HB	SA-275	35 - 65	2,4 - 4,5	
26 x 2 x 1 1/2	54-584	SS	S-154	50 - 65	3,5 - 4,5	
27 x 1 1/4	32-630	SS	S-131	80 - 100	5,5 - 6,9	
27 x 1 3/8	37-630	SS	S-116	44 - 100	3,0 - 6,9	
	37-630	SS	SA-237	44 - 100	3,0 - 6,9	
27.5 x 1.75	47-584	SS	S-601	35 - 65	2,4 - 4,5	
	47-584	SS	SA-225	47 - 65	2,4 - 4,5	
28 x 1 1/2	40-635	SS	S-110	35 - 65	2,4 - 4,5	
	40-635	SS	S-131	35 - 65	2,4 - 4,5	
	40-635	SS	S-604	35 - 65	2,4 - 4,5	

CITY - TREKKING - URBAN TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
28 x 1 1/2	40-635	SS	SA-214	35 - 65	2,4 - 4,5	
	40-635	SS	SA-218	35 - 65	2,4 - 4,5	
	40-635	SS	SA-220	35 - 65	2,4 - 4,5	
	40-635	SS	SA-234	35 - 65	2,4 - 4,5	
28 x 1.75	47-622	SS	S-141	35 - 65	2,4 - 4,5	
28 x 2.00	50-622	SS	SA-272	35 - 65	2,4 - 4,5	
28 x 1.75 x 2	47-622	SS	S-141	35 - 65	2,4 - 4,5	
29 x 1.75	47-622	SS	S-601	35 - 65	2,4 - 4,5	
29 x 2.35	60-622	SS	SA-275	35 - 65	2,4 - 4,5	
	47-622	SS	SA-225	35 - 65	2,4 - 4,5	
700 x 28C	28-622	SS	S-155	80 - 102	5,5 - 7,0	
	28-622	SS	S-192	80 - 102	5,5 - 7,0	
	28-622	SS	SA-299	80 - 102	5,5 - 7,0	
700 x 32C	32-622	SS	S-131	50 - 80	3,5 - 5,5	
	32-622	SS	S-140	50 - 80	3,5 - 5,5	
	32-622	SS	S-192	50 - 80	3,5 - 5,5	
700 x 35C	37-622	SS	S-140	50 - 80	3,5 - 5,5	
	37-622	SS	S-141	50 - 80	3,5 - 5,5	
	37-622	SS	S-192	50 - 80	3,5 - 5,5	
	37-622	SS	S-198	50 - 80	3,5 - 5,5	
	37-622	SS	S-604	50 - 80	3,5 - 5,5	
	37-622	SS	SA-201	50 - 80	3,5 - 5,5	
700 x 38C	37-622	SS	SA-225	50 - 80	3,5 - 5,5	
	37-622	SS	SA-230	50 - 80	3,5 - 5,5	
	37-622	SS	SA-234	50 - 80	3,5 - 5,5	
	37-622	SS	SA-262	50 - 80	3,5 - 5,5	
700 x 37C	37-622	SS	SA-207	50 - 80	3,5 - 5,5	
700 x 38C	40-622	SS	S-161	50 - 80	3,5 - 5,5	
	40-622	SS	S-602	50 - 80	3,5 - 5,5	
	40-622	SS	SA-234	50 - 80	3,5 - 5,5	
	40-622	SS	SA-235	50 - 80	3,5 - 5,5	
	40-622	SS	SA-265	50 - 80	3,5 - 5,5	
	40-622	SS	SA-209	50 - 80	3,5 - 5,5	
700 x 40C	42-622	SS	SA-274	35 - 65	2,4 - 4,5	
700 x 45C	47-622	SS	SA-209	35 - 65	2,4 - 4,5	
	47-622	SS	SA-234	35 - 65	2,4 - 4,5	
	47-622	SS	SA-296	35 - 65	2,4 - 4,5	

FAT-BIKE TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
26 x 4.0	100-559	SS	SA-280	30	2,0	

PLUS TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
26 x 2.80	70-559	SS	SA-255	17 - 38	1,2 - 2,6	
27.5 x 2.80	70-684	SS	SA-281	17 - 38	1,2 - 2,6	

OFF-ROAD TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
24 x 1.75	47-507	HB	S-143	35 - 65	2,4 - 4,5	
	47-507	HB	S-157	35 - 65	2,4 - 4,5	
	47-507	HB	S-176A	35 - 65	2,4 - 4,5	
	47-507	HB	S-602	35 - 65	2,4 - 4,5	
	47-507	HB	SA-207	35 - 65	2,4 - 4,5	
	47-507	HB	SA-243	35 - 65	2,4 - 4,5	
24 x 1.90	50-507	HB	S-143	35 - 65	2,4 - 4,5	
	50-507	HB	S-153	35 - 65	2,4 - 4,5	
	50-507	HB	S-179	35 - 65	2,4 - 4,5	
24 x 1.95	50-507	HB	S-613	35 - 65	2,4 - 4,5	
	50-507	HB	S-614	35 - 65	2,4 - 4,5	
24 x 2.00	54-507	HB	S-160	35 - 65	2,4 - 4,5	
	54-507	HB	S-165	35 - 65	2,4 - 4,5	
	54-507	HB	S-168	35 - 65	2,4 - 4,5	
	54-507	HB	S-176	35 - 65	2,4 - 4,5	
	54-507	HB	S-609	35 - 65	2,4 - 4,5	
	54-507	HB	S-610	35 - 65	2,4 - 4,5	
	54-507	HB	SA-224	35 - 65	2,4 - 4,5	
	54-507	HB	S-178	35 - 65	2,4 - 4,5	
24 x 2.10	54-507	HB	S-178	35 - 65	2,4 - 4,5	
26 x 1.50	40-559	HB	S-153	35 - 65	2,4 - 4,5	
26 x 1.75	47-559	HB	S-143	35 - 65	2,4 - 4,5	
	47-559	HB	S-157	35 - 65	2,4 - 4,5	
	47-559	HB	S-176A	35 - 65	2,4 - 4,5	
26 x 1.90	50-559	HB	S-179	35 - 65	2,4 - 4,5	
	50-559	HB	S-602	35 - 65	2,4 - 4,5	
	50-559	HB	S-616	35 - 65	2,4 - 4,5	
	50-559	HB	S-619	35 - 65	2,4 - 4,5	
	50-559	HB	S-621	35 - 65	2,4 - 4,5	
	50-559	HB	S-622	35 - 65	2,4 - 4,5	
	50-559	HB	SA-207	35 - 65	2,4 - 4,5	
26 x 1.95	50-559	HB	S-153	35 - 65	2,4 - 4,5	
	50-559	HB	S-150	35 - 65	2,4 - 4,5	
	50-559	HB	S-613	35 - 65	2,4 - 4,5	
	50-559	HB	S-614	35 - 65	2,4 - 4,5	
	50-559	HB	S-620	35 - 65	2,4 - 4,5	
	50-559	HB	SA-236	35 - 65	2,4 - 4,5	
	50-559	HB	SA-254	35 - 65	2,4 - 4,5	
	50-559	HB	SA-257	35 - 65	2,4 - 4,5	
26 x 2.00	54-559	HB	S-159	35 - 65	2,4 - 4,5	
	54-559	HB	S-160	35 - 65	2,4 - 4,5	
	54-559	HB	S-165	35 - 65	2,4 - 4,5	
	54-559	HB	S-168	35 - 65	2,4 - 4,5	
	54-559	HB	S-176	35 - 65	2,4 - 4,5	
	54-559	HB	S-609	35 - 65	2,4 - 4,5	

OFF-ROAD TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
26 x 2.00	54-559	HB	S-610	35 - 65	2,4 - 4,5	
26 x 2.10	56-559	HB	S-100	35 - 65	2,4 - 4,5	
	56-559	HB	S-190	35 - 65	2,4 - 4,5	
	54-559	HB	S-622	35 - 65	2,4 - 4,5	
	56-559	HB	SA-201	35 - 65	2,4 - 4,5	
	54-559	HB	SA-224	35 - 65	2,4 - 4,5	
	54-559	HB	SA-229	35 - 65	2,4 - 4,5	
	51-559	HB	SA-239	35 - 65	2,4 - 4,5	
	54-559	HB	SA-255	35 - 65	2,4 - 4,5	
	54-559	HB	SA-270	35 - 65	2,4 - 4,5	
26 x 2.35	53-559	HB	SA-239	35 - 65	2,4 - 4,5	
26 x 2.50	56-559	HB	SA-239	35 - 65	2,4 - 4,5	
27.5 x 1.90	50-584	SS	SA-255	35 - 65	2,4 - 4,5	
27.5 x 2.10	54-584	SS	SA-255	35 - 65	2,4 - 4,5	
	54-584	SS	SA-263	35 - 65	2,4 - 4,5	
	54-584	SS	SA-270	35 - 65	2,4 - 4,5	
27.5 x 2.25	57-584	SS	SA-258	35 - 65	2,4 - 4,5	
	57-584	SS	SA-261	35 - 65	2,4 - 4,5	
27.5 x 2.35	60-584	SS	SA-261	23 - 50	1,6 - 3,5	
27.5 x 2.50	55-584	SS	SA-239	35 - 65	2,4 - 4,5	
27.5 x 3.00	75-584	SS	SA-261	15-35	1,0 - 2,4	
29 x 1.90	50-622	SS	SA-255	35 - 65	2,4 - 4,5	
29 x 2.10	54-622	SS	SA-258	35 - 65	2,4 - 4,5	
	54-622	SS	SA-270	35 - 65	2,4 - 4,5	
29 x 2.25	57-622	SS	SA-264	35 - 65	2,4 - 4,5	
	57-622	SS	SA-261	35 - 65	2,4 - 4,5	

FREESTYLE - CROSS - KIDS TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	SAR	REMARK
12 1/2x1.75x2 1/4	47-203	SS	S-141	35 - 50	2,4 - 3,5	
	47-203	SS	S-143	35 - 50	2,4 - 3,5	
	47-203	SS	S-186	35 - 50	2,4 - 3,5	
	47-203	SS	S-196	35 - 50	2,4 - 3,5	
	47-203	SS	S-602	35 - 50	2,4 - 3,5	
	47-203	SS	SA-203	35 - 50	2,4 - 3,5	
	47-203	SS	SA-206	35 - 50	2,4 - 3,5	
12 1/2 x 2 1/4	62-203	HB	S-101	35 - 50	2,4 - 3,5	
	62-203	HB	S-168	35 - 50	2,4 - 3,5	
	62-203	HB	S-173	35 - 50	2,4 - 3,5	
	62-203	HB	S-615	35 - 50	2,4 - 3,5	
	62-203	HB	SA-206	35 - 50	2,4 - 3,5	
14 x 1 3/8 x 1 5/8	44-288	SS	S-141	35 - 50	2,4 - 3,5	
	44-288	SS	S-143	35 - 50	2,4 - 3,5	
	44-288	SS	S-179	35 - 50	2,4 - 3,5	
	44-288	SS	S-186	35 - 50	2,4 - 3,5	
	44-288	SS	S-602	35 - 50	2,4 - 3,5	
	44-288	SS	SA-203	35 - 50	2,4 - 3,5	
	44-288	SS	SA-206	35 - 50	2,4 - 3,5	
14 x 1.75	47-254	SS	S-101	35 - 50	2,4 - 3,5	
	47-254	HB	S-153	35 - 50	2,4 - 3,5	
	47-254	SS	S-186	35 - 50	2,4 - 3,5	
	47-254	SS	S-196	35 - 50	2,4 - 3,5	
	47-254	SS	SA-206	35 - 50	2,4 - 3,5	
	47-254	SS	SA-233	35 - 50	2,4 - 3,5	
14 x 2.125	57-254	HB	S-101	35 - 50	2,4 - 3,5	
16 x 1 3/8	37-349	SS	S-110	35 - 50	2,4 - 3,5	
16 x 1 3/4	47-349	SS	S-101	35 - 50	2,4 - 3,5	
16 x 1.50	40-305	HB	SA-235	35 - 50	2,4 - 3,5	
16 x 1.75 x 2	42-305	SS	S-141	35 - 50	2,4 - 3,5	
	47-305	SS	S-196	35 - 50	2,4 - 3,5	
16 x 1.75	47-305	HB	S-101	35 - 50	2,4 - 3,5	
	47-305	HB	S-110	35 - 50	2,4 - 3,5	
	47-305	HB	S-117	35 - 50	2,4 - 3,5	
	47-305	HB	S-153	35 - 50	2,4 - 3,5	
	47-305	HB	S-168	35 - 50	2,4 - 3,5	
	47-305	HB	S-179	35 - 50	2,4 - 3,5	
	47-305	HB	S-186	35 - 50	2,4 - 3,5	
	47-305	HB	S-602	35 - 50	2,4 - 3,5	
	47-305	HB	SA-203	35 - 50	2,4 - 3,5	
	47-305	HB	SA-206	35 - 50	2,4 - 3,5	
	47-305	HB	SA-207	35 - 50	2,4 - 3,5	
	47-305	HB	SA-233	35 - 50	2,4 - 3,5	
	47-305	HB	S-153	35 - 50	2,4 - 3,5	
	47-305	HB	S-168	35 - 50	2,4 - 3,5	
	47-305	HB	S-179	35 - 50	2,4 - 3,5	

E-BIKE TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	SAR	REMARK
26 x 1.75	47-559	HB	SA-206	35-65	2,4-4,5	
700 x 35C	37-622	SS	SA-234	50-80	3,5-5,5	
700 x 35C	37-622	SS	SA-262	50-80	3,5-5,5	
700 x 38C	40-622	SS	SA-235	50-80	3,5-5,5	
700 x 45C	47-622	SS	SA-234	35-65	2,4-4,5	

FREESTYLE - CROSS - KIDS TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
16 x 2.125	57-305	HB	S-101	35 - 50	2,4 - 3,5	
	57-305	HB	S-146	35 - 50	2,4 - 3,5	
	57-305	HB	S-165	35 - 50	2,4 - 3,5	
	57-305	HB	SA-210B	35 - 50	2,4 - 3,5	
	57-305	HB	S-615	35 - 50	2,4 - 3,5	
18 x 1.75 x 2	47-355	SS	S-141	35 - 50	2,4 - 3,5	
18 x 1.75	47-355	HB	SA-206	35 - 50	2,4 - 3,5	
	47-355	HB	SA-207	35 - 50	2,4 - 3,5	
20 x 1.75	47-406	HB	S-101	35 - 50	2,4 - 3,5	
	47-406	HB	S-109	35 - 50	2,4 - 3,5	
	47-406	HB	S-117	35 - 50	2,4 - 3,5	
	47-406	HB	S-143	35 - 50	2,4 - 3,5	
	47-406	HB	S-176	35 - 50	2,4 - 3,5	
	47-406	HB	S-179	35 - 50	2,4 - 3,5	
	47-406	HB	S-199	35 - 50	2,4 - 3,5	
	47-406	HB	S-602	35 - 50	2,4 - 3,5	
	47-406	HB	SA-207	35 - 50	2,4 - 3,5	
	47-406	HB	SA-240	35 - 50	2,4 - 3,5	
20 x 1.99	50-406	HB	S-153	35 - 50	2,4 - 3,5	
	50-406	HB	S-186	35 - 50	2,4 - 3,5	
	50-406	HB	S-615	35 - 50	2,4 - 3,5	
	50-406	HB	S-199	35 - 50	2,4 - 3,5	
	50-406	HB	SA-282	35 - 55	2,4 - 4,5	
20 x 2.09	54-406	HB	S-183	35 - 50	2,4 - 3,5	
	54-406	HB	S-174	35 - 50	2,4 - 3,5	
	54-406	HB	S-178	35 - 50	2,4 - 3,5	
20 x 2.125	57-406	HB	S-101	35 - 50	2,4 - 3,5	
	57-406	HB	S-114	35 - 50	2,4 - 3,5	
	57-406	HB	S-118	35 - 50	2,4 - 3,5	
	57-406	HB	S-146	35 - 50	2,4 - 3,5	
	57-406	HB	SA-240	35 - 50	2,4 - 3,5	
22 x 1.75	47-456	HB	S-101	35 - 50	2,4 - 3,5	
	47-456	HB	S-109	35 - 50	2,4 - 3,5	
	47-456	HB	S-176	35 - 50	2,4 - 3,5	
	47-456	HB	SA-207	35 - 50	2,4 - 3,5	

WHEELCHAIR TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
24 x 1.98	37-540	SS	S-187	50 - 70	3,5 - 4,8	

STROLLER TIRES

Size	ETRTO (mm)	Rim type	Pattern	PSI	BAR	REMARK
12" x 1.75 x 2"	51-303	SS	SA-227	35-50	2,4-3,5	
12" x 2"	62-203	SS	SA-253	35-50	2,4-3,5	
10 x 2.0	54-152	HB	SA-259	35-50	2,4-3,5	
	54-152	HB	SA-206	35-50	2,4-3,5	
12" x 2"	62-303	HB	SA-259	35-50	2,4-3,5	
50 x 160	---	HB	SA-266	28-40	2,0-2,8	
225 x 48	---	HB	SA-266	28-40	2,0-2,8	
280 x 65	---	HB	SA-266	28-40	2,0-2,8	

100% TESTED QUALITY

INNER TUBE LIST

Our inner tubes and valves are individually inspected through a 24 h inflated pressure test to guarantee full performance and impeccable quality.

	SIZE	ETRTO
10"	48-188	48-188
	60-238	60-238
	18 X 2.5/2.125	54-152
11"	50 X 180	57-152
	11 X 1.288	47-222
12"	12 X 1.75 X 2.1/4	47-203
	12 1/2 X 2.1/4	47-203
	12 1/2 X 1.75 (1.59")	50-203
	12 X 1.38 X 1.58	62-203
14"	14 X 1.1/4	—
	14 X 1.1/2 NL	32-258
	14 X 1.3/8 X 1.58 (3504)	40-258
	14 X 1.75/2.125	44-258
	14 X 2.125	47-254
	14 X 2.125	54-254
16"	16 X 1.25/1.88	56-254
	16 X 2.125	57-254
	16 X 1.75/2.125	57-254
	16 X 2.125	32-305
	16 X 2.125	37-305
	16 X 2.125	40-305
	16 X 1.50/2.00*	40-305
	16 X 1.75/2.125	47-305
	16 X 1.75/2.125	50-305
	16 X 2.125*	54-305
18"	18 X 1.3/8 X 1.5/4	57-305
	18 X 1.5	57-349
	18 X 1.75/2.125	47-349
	18 X 1.75/2.125	—
20"	20 X 1.3/8	37-400
	20 X 1.75/2.125	47-350
	20 X 1.75/2.125	57-350
	20 X 1.75/2.125	37-451
25"	20 X 1.50/2.00*	40-400
	20 X 1.50/2.00*	47-400
	20 X 1.50/2.00*	50-400
	20 X 1.50/2.00*	54-400
	20 X 1.75/2.125	47-400
	20 X 1.75/2.125	50-400
	20 X 1.75/2.125	54-400
	20 X 1.75/2.125	57-400
	20 X 1.75/2.125	20-451
	20 X 1.75/2.125	32-451
	20 X 1.75/2.125	35-451
	20 X 1.75/2.125	37-451
	20 X 1.75/2.125	32-400
	20 X 1.75/2.125	35-400
	20 X 1.75/2.125	37-400
28"	20 X 2.125/2.30*	38-400
	20 X 2.125/2.30*	40-400
	20 X 2.125/2.30*	47-400
	20 X 2.125/2.30*	50-400
	20 X 2.125/2.30*	54-400
	20 X 2.125/2.30*	57-400
30"	20 X 2.125/2.30*	57-400
	20 X 2.125/2.30*	57-400
	20 X 2.125/2.30*	57-400

22"	22 X 1.3/8	37-501
	22 X 1.75/2.125*	47-450
	22 X 1.75/2.125*	50-450
	22 X 1.75/2.125*	54-450
24"	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501
	24 X 1.3/8	37-501

26"	26 X 1.1/2 (6660 STD)	25-550
	26 X 1.1/2 (6660 STD)	28-550
	26 X 1.1/2 (6660 STD)	30-550
	26 X 1.1/2 (6660 STD)	32-550
	26 X 1.1/2 (6660 STD)	35-571
	26 X 1.1/2 (6660 STD)	37-571
	26 X 1.1/2 (6660 STD)	37-571
	26 X 1.1/2 (6660 STD)	37-571
	26 X 1.1/2 (6660 STD)	37-571
	26 X 1.1/2 (6660 STD)	37-571
28"	28 X 1.1/2 (6660 STD)	32-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
	28 X 1.1/2 (6660 STD)	37-571
30"	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571
	30 X 1.1/2 (6660 STD)	37-571

OUR DETAILS

AVAILABLE VALVES

Deli Tire produces its tires using four types of valves, ensuring the maximum compatibility.



AMERICAN VALVE

AR




ITALIAN VALVE

Italian



ENGLISH VALVE

Tr-1 / Easy Pump




FRENCH VALVE

36/43/52/60/80 mm

PACKAGING

AFTERMARKET

Put a tire expert in your shop.
Deli Tire tires and tubes can come with special branded aftermarket boxes.

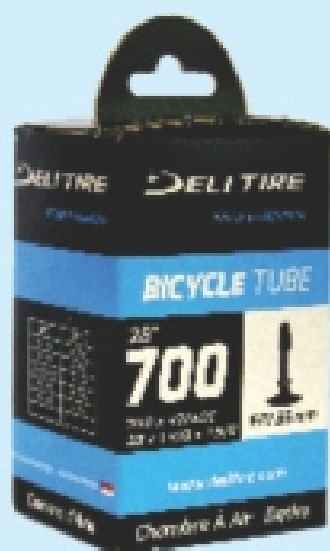

BICYCLE TUBE

PACKAGING



FOLDING TIRE

PACKAGING



BIKE TIRE

PACKAGING



Sovereign EXPORTS

168-B, Industrial Estate, Ludhiana - 141003, Punjab, India

Ph. : +91-161-5204000, Fax : +91-161-5011161

E-mail : info@sovereignexports.com

Website : <http://www.sovereignexports.com>